

# A17251-DA



172x151x51mm(6.8"x5.9"x2")




HOUSING  
IMPELLER  
BEARING  
OPERATING TEMPERATURE  
INSULATION  
OPERATING VOLTAGE RANGE  
  
DIELECTRIC STRENGTH  
INSULATION RESISTANCE  
MOTOR TYPE  
SAFETY  
TERMINATION  
WEIGHT  
ROHS COMPLIANCE  
IP LEVEL

Aluminum Die Casting, Painted Black  
Thermoplastic PBT, UL94V-0  
Ball  
-20°C to + 70°C  
Class B  
104 VAC to 126 VAC for 115V Type  
207 VAC to 253 VAC for 230V Type  
5mA Max. at 1800 VAC for 1 second  
10M Ω min. @500 VDC  
Outer Rotor, AC Induction Capacitor Motor  
Thermally Protected  
Terminals or Lead Wire  
1050 g  
Yes  
IP54(Special IP Rating On Request)

# 172mm

172 mm

## DIMENSION

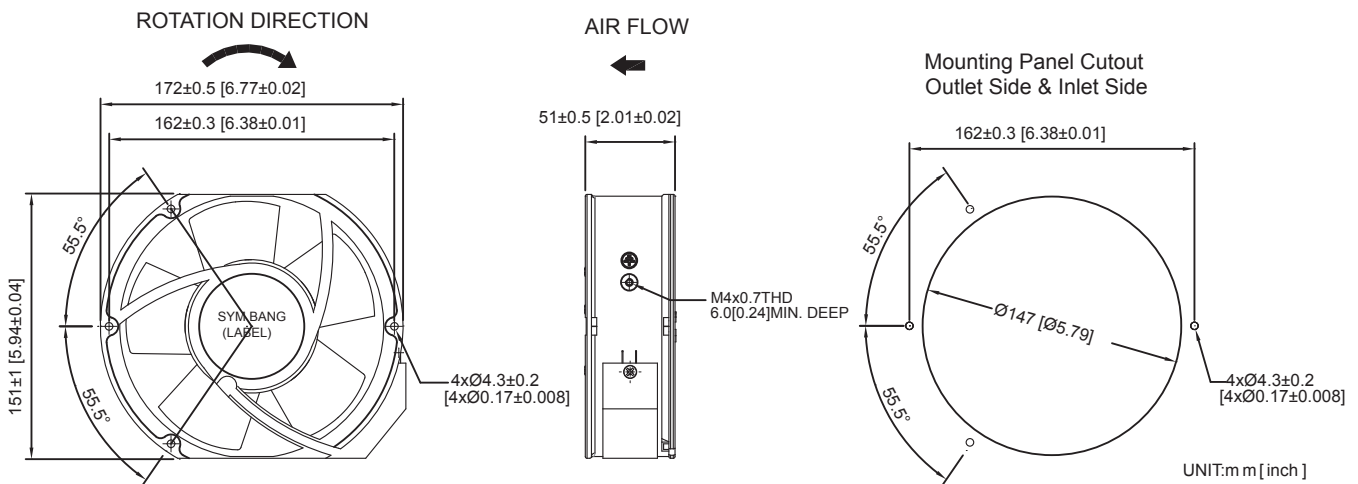

## SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH <sub>2</sub> O	mmH <sub>2</sub> O	CFM	m <sup>3</sup> /min	
A17251V1SB-DA	115	50/60	0.28/0.24	27/27	2800/3300	0.64/0.78	16.5/20.0	230/270	6.5/7.64	55/61
A17251V1HB-DA	115	50/60	0.25/0.23	27/27	2650/3050	0.55/0.61	14/15.5	210/250	5.94/7.07	53/59
A17251V2SB-DA	230	50/60	0.11/0.12	24/27	2800/3300	0.64/0.78	16.5/20.0	230/270	6.5/7.64	55/61
A17251V2HB-DA	230	50/60	0.11/0.11	26/26	2650/3050	0.55/0.61	14/15.5	210/250	5.94/7.07	53/59

## AIR PERFORMANCE

