

A17251-JS

172x151x51mm(6.8"x5.9"x2")




HOUSING Aluminum Die Casting, Painted Black
IMPELLER Thermoplastic PBT, UL94V-0
BEARING Ball
OPERATING TEMPERATURE -20°C to + 80°C
INSULATION Class A
OPERATING VOLTAGE RANGE 85VAC to 125 VAC for 115V Type
 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH 5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE 10M Ω min. @500 VDC
MOTOR TYPE Outer Rotor, AC Induction Capacitor Motor
SAFETY Thermally Protected
TERMINATION Terminals or Lead Wire
WEIGHT 900 g
ROHS COMPLIANCE Yes
IP LEVEL IP21(Special IP Rating On Request)

172mm

172mm

DIMENSION

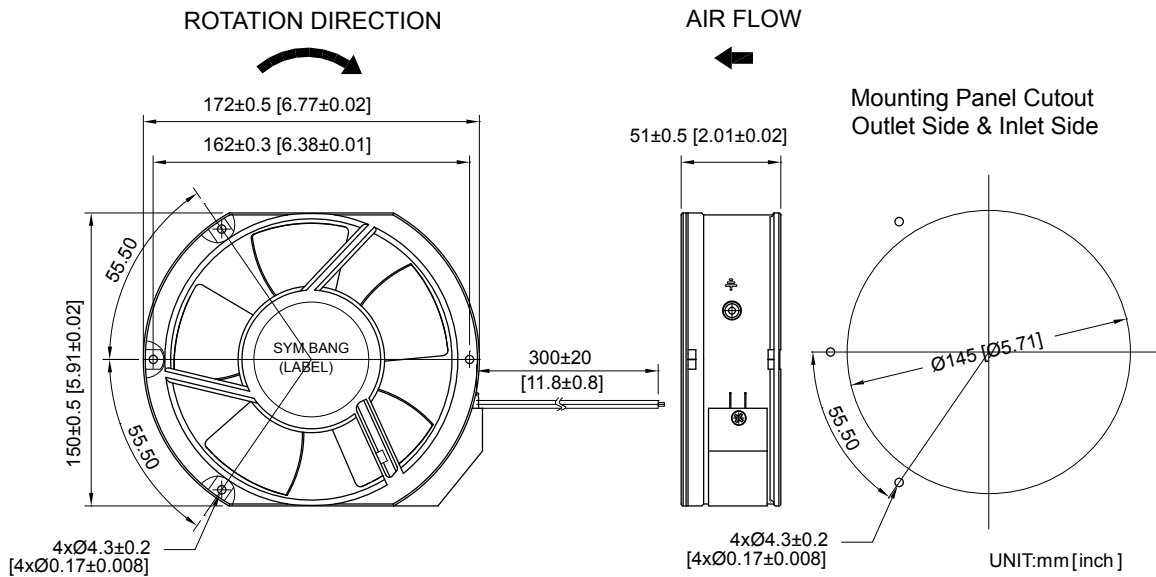

SPECIFICATION

MODEL NO.	RATED VOLTAGE (V)	FREQUENCY (Hz)	RATED CURRENT (A)	INPUT POWER (W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
						inchH ₂ O	mmH ₂ O	CFM	m ³ /min	
A17251V1-JS	115	50/60	0.12/0.11	26/25	2750/3250	0.57/0.72	14.5/18.5	215/250	6.08/7.07	52/57
A17251V2-JS	230	50/60	0.23/0.22	26/25	2750/3250	0.57/0.72	14.5/18.5	215/250	6.08/7.07	52/57

AIR PERFORMANCE

